




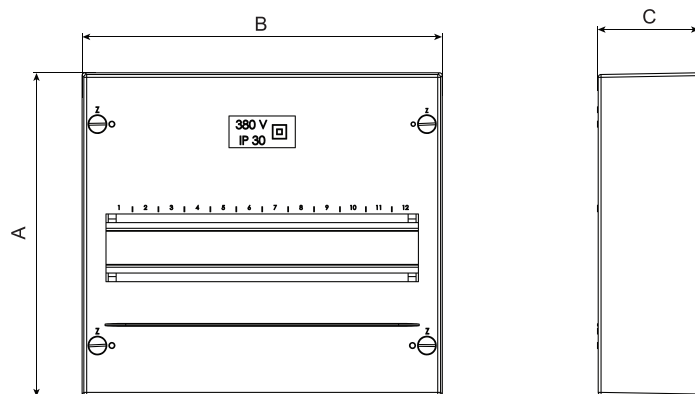

DIN rail mounting	A	B	C	Pde
N1A	130 mm	51 mm	57 mm	14 W
N2A	130 mm	87 mm	57 mm	14 W
N3A	155 mm	97 mm	57 mm	14 W
N12A	225 mm	250 mm	70 mm	22 W
N24A	353 mm	250 mm	70 mm	22 W
N36A	463 mm	250 mm	70 mm	26 W

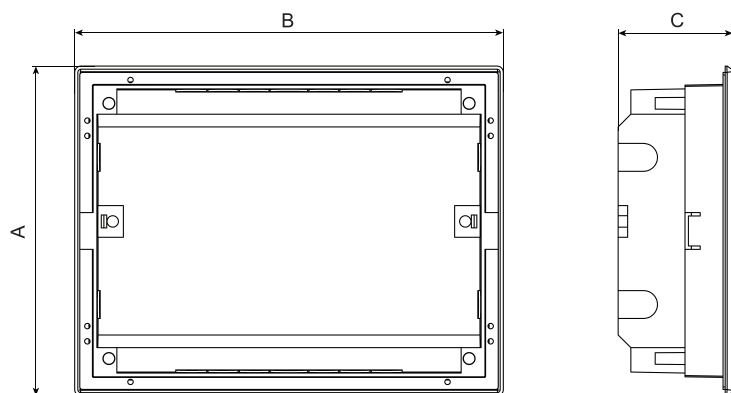


DIN rail mounting	A	B	C	Pde
U12A	260 mm	338 mm	88 mm	53 W
U24A	380 mm	338 mm	92 mm	69 W
U36A	508 mm	338 mm	92 mm	84 W

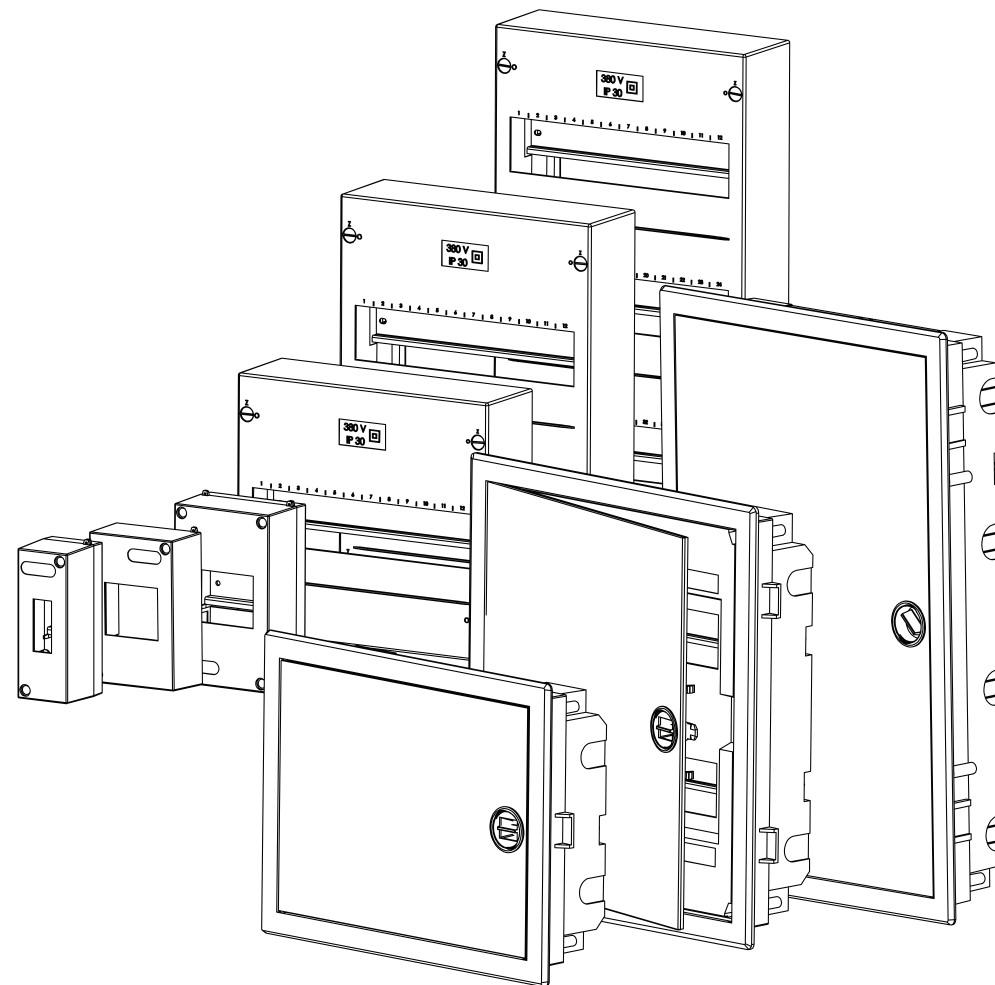


For indoor locations ($\leq 50\%$ RH at max. $+40^{\circ}\text{C}$ or for example 90% RH at $+20^{\circ}\text{C}$)
 Temperature range: -25°C ... $+60^{\circ}\text{C}$, Rated voltage AC 400 V; IP40; Class II,
 According to: IEC 60670

Zdravka Jekića 119, 22305 Stari Banovci, Serbia
 Phone: +381 22 351 223
 e-mail: office@tehno-plast.com

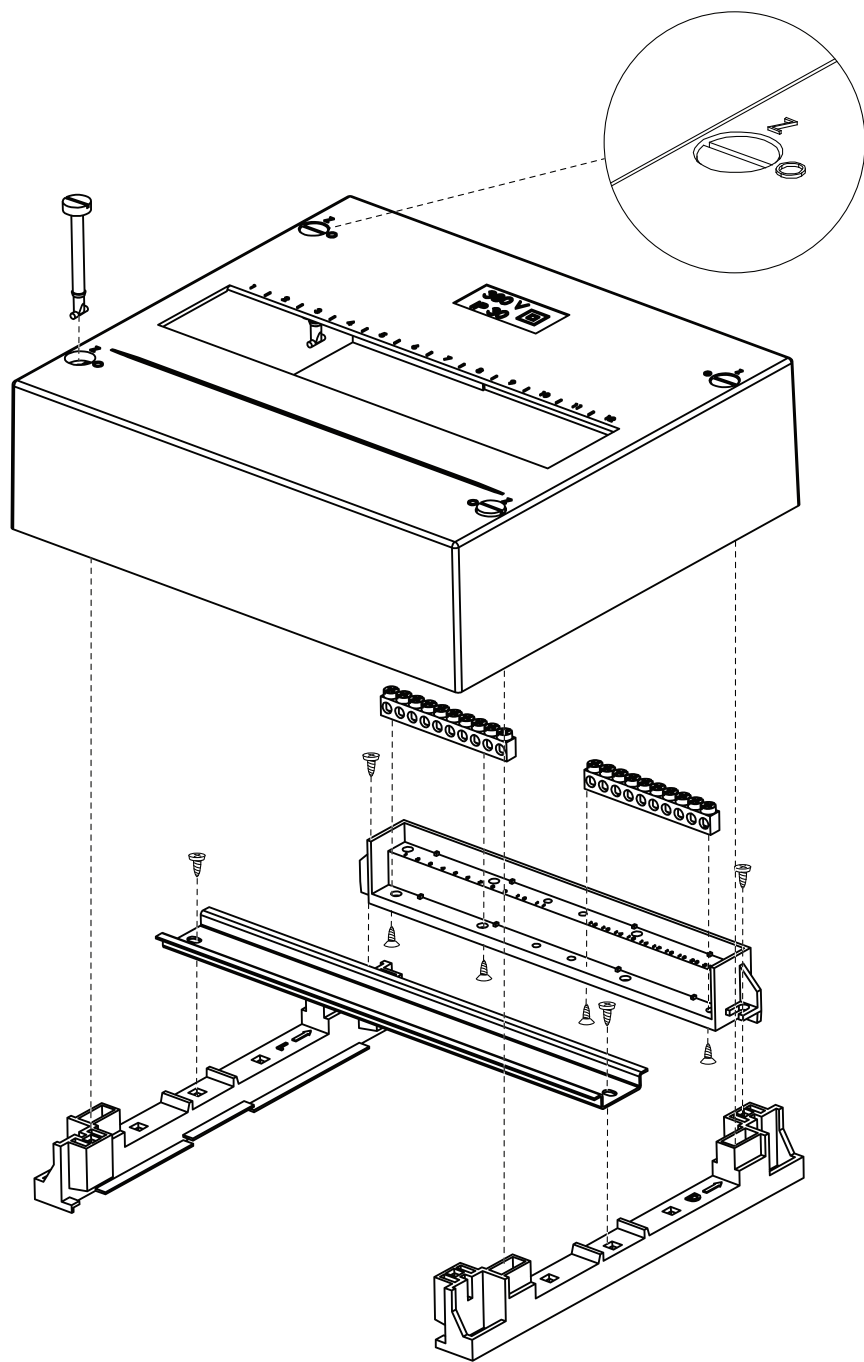

DIN RAIL MOUNTING

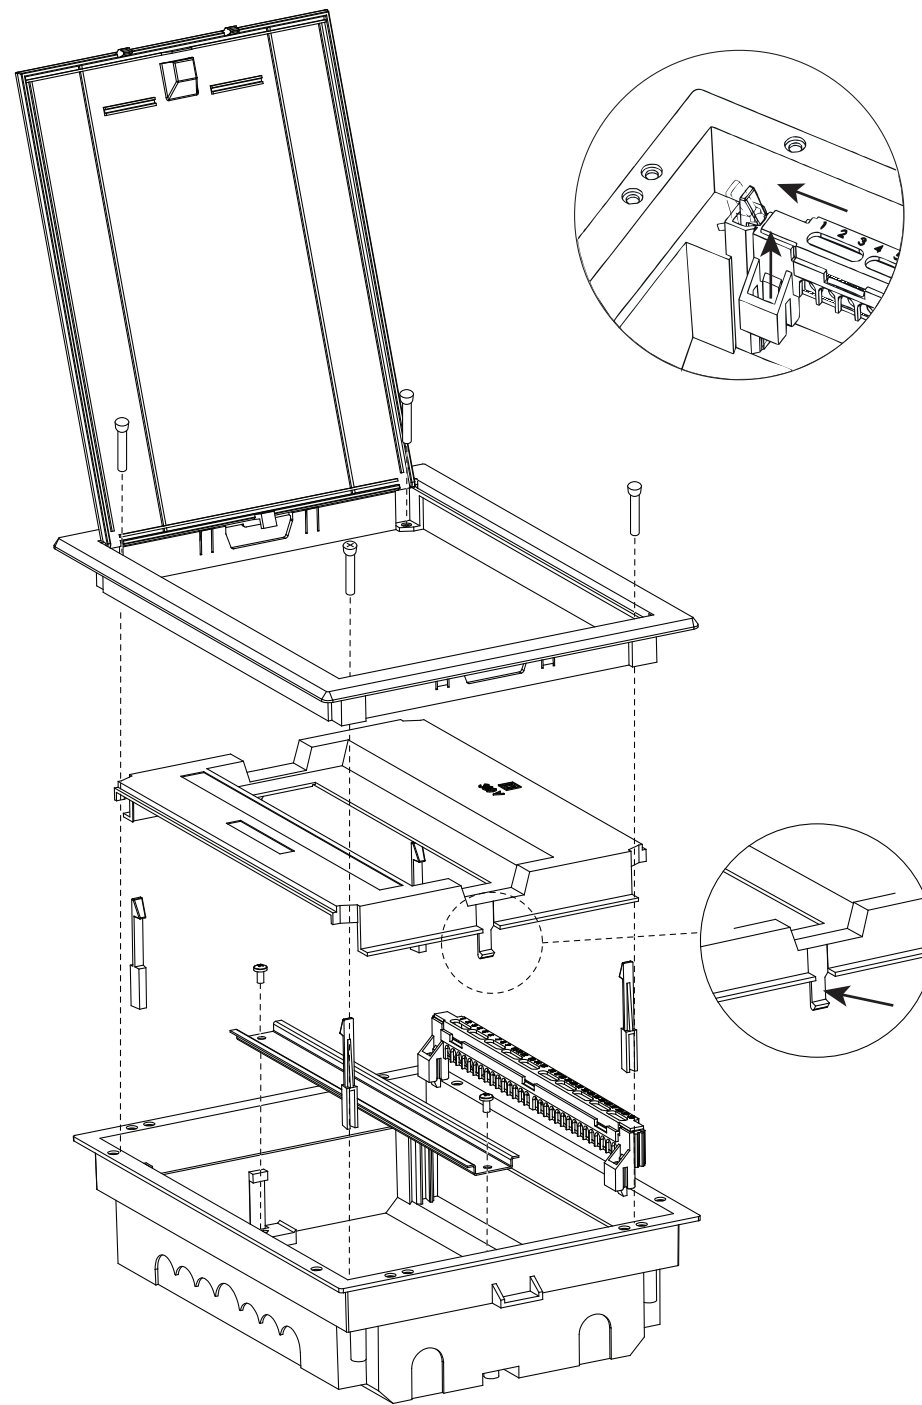

DIN RAIL MOUNTING