

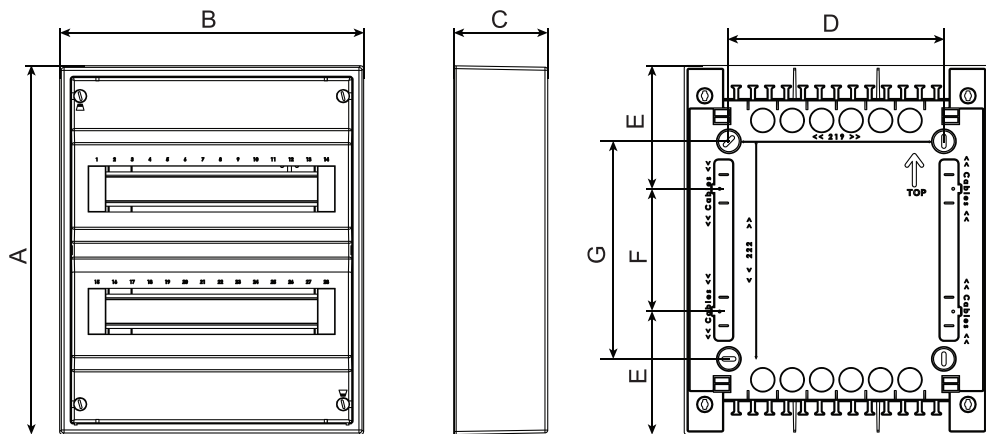



GP

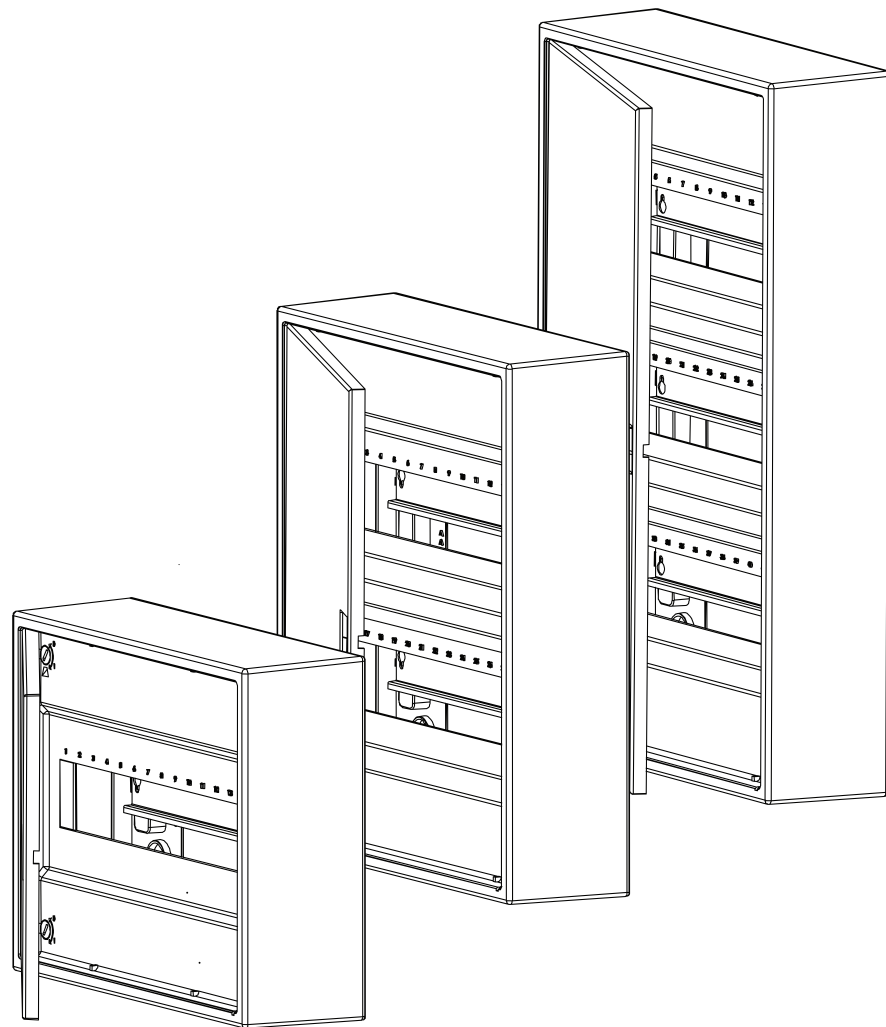

	A	B	C	D	E	F	G	Pde	Static load
N12 ALFA	251 mm	310 mm	96 mm	125 mm	126 mm	125 mm	126 mm	> 30 W	1820g
N24 ALFA	377 mm	310 mm	96 mm	223 mm	126 mm	125 mm	126 mm	> 40 W	1820g
N36 ALFA	505 mm	310 mm	96 mm	125 mm	126 mm	125 mm	126 mm	> 60W	1820g

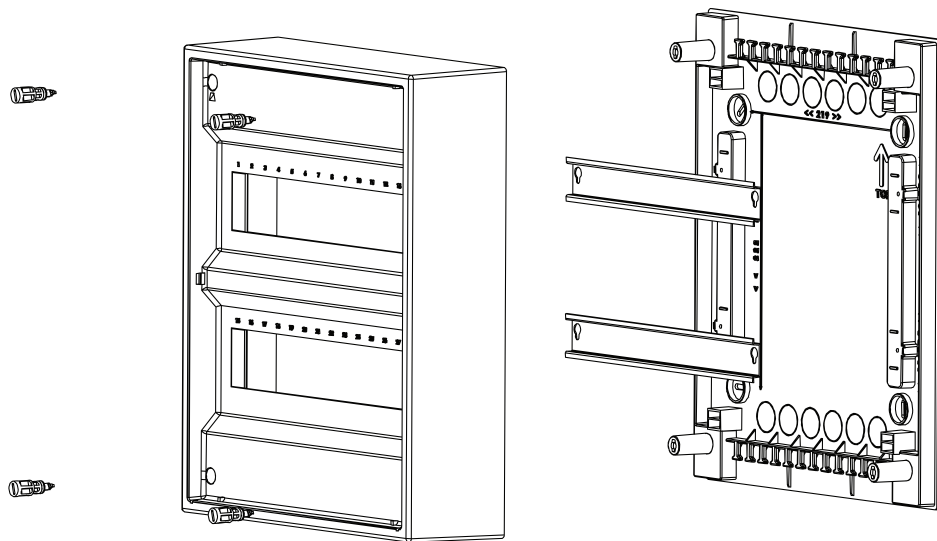

For indoor locations ($\leq 50\%$ RH at max. $+40^{\circ}\text{C}$ or for example 90% RH at $+20^{\circ}\text{C}$)
 Temperature range: -25°C ... $+60^{\circ}\text{C}$, Rating Voltage AC 400 V; IP40; Class II, IK07
 According to: IEC 60670; IEC 62208

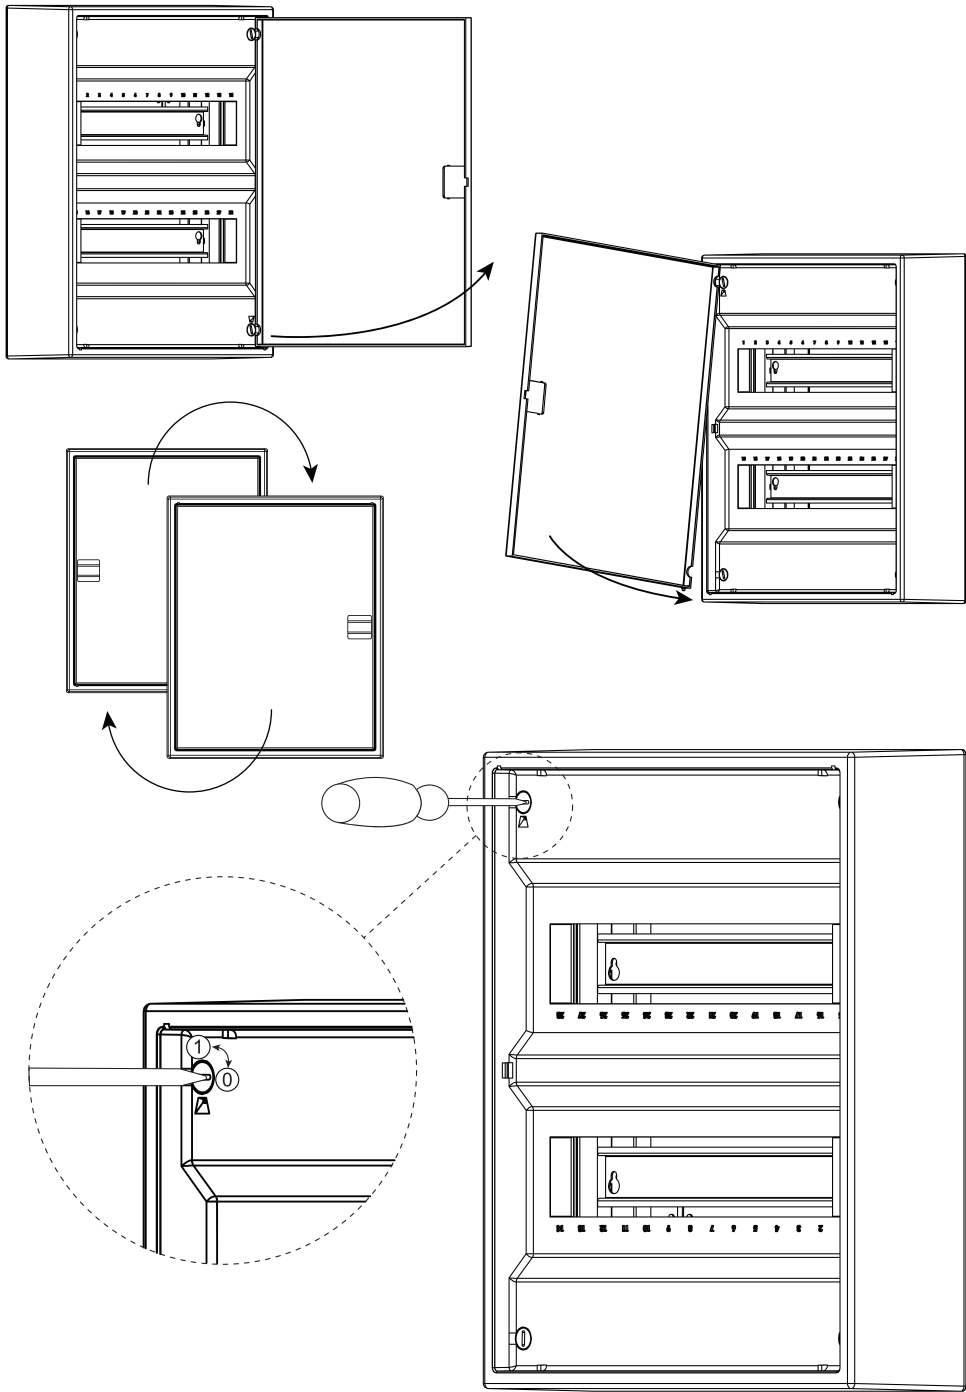

DIN RAIL MOUNTING

