




GP

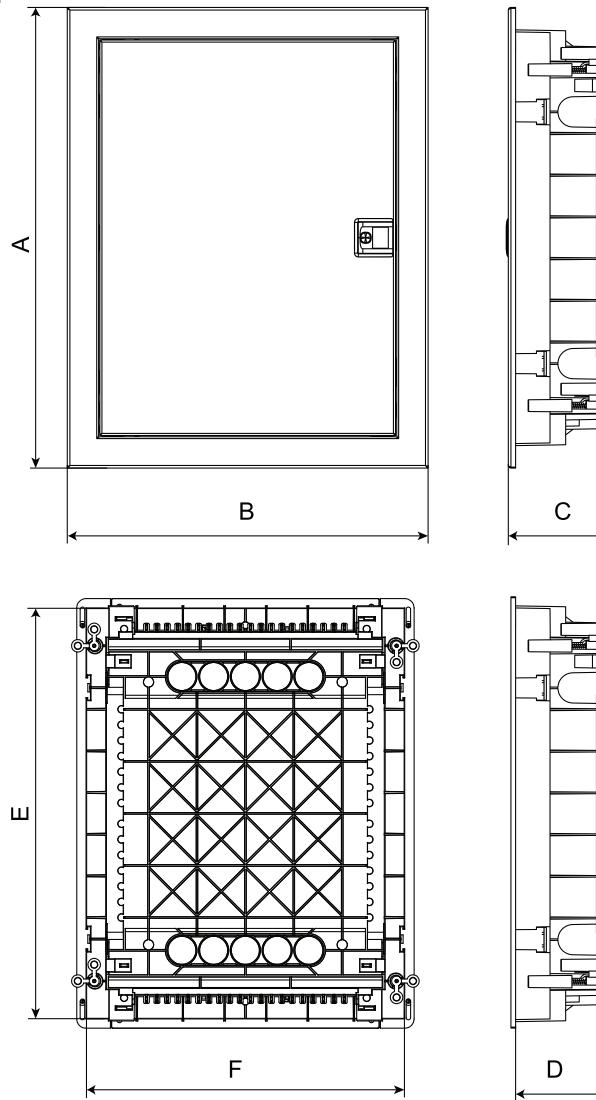

TEHNOPLAST

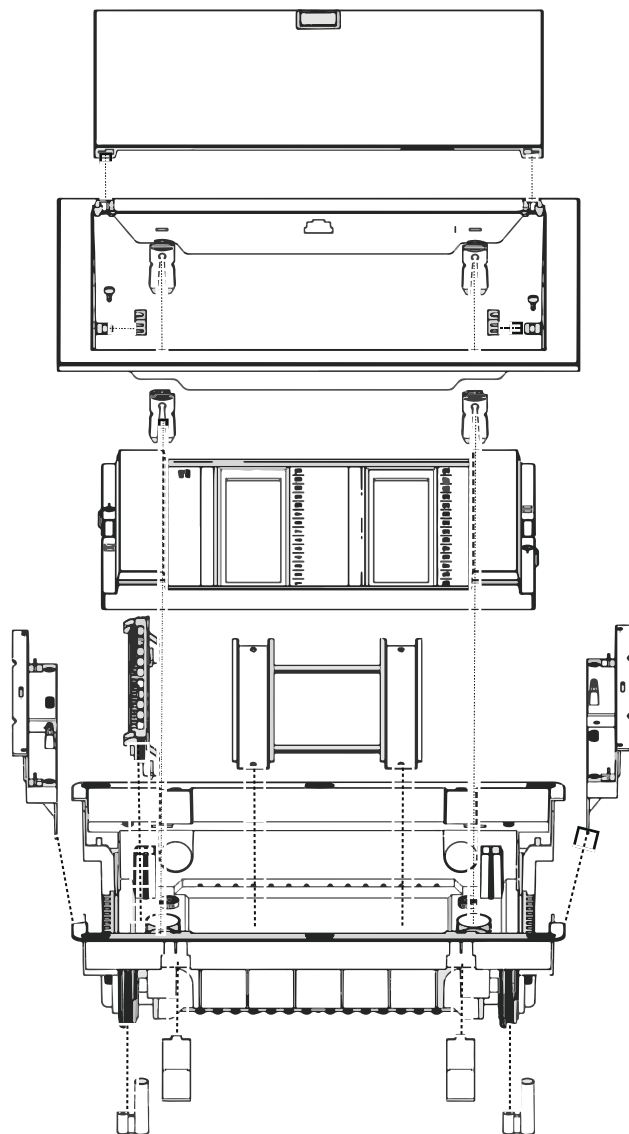

	A	B	C	D	E	F
U12 E	317 mm	346 mm	92 mm	87 mm	274 mm	306 mm
U24 E	442 mm	346 mm	92 mm	87 mm	399 mm	306 mm
U36 E	592 mm	346 mm	92 mm	87 mm	549 mm	306 mm
U48 E	717 mm	346 mm	92 mm	87 mm	673 mm	306 mm
U60 E	842 mm	346 mm	92 mm	87 mm	799 mm	306 mm

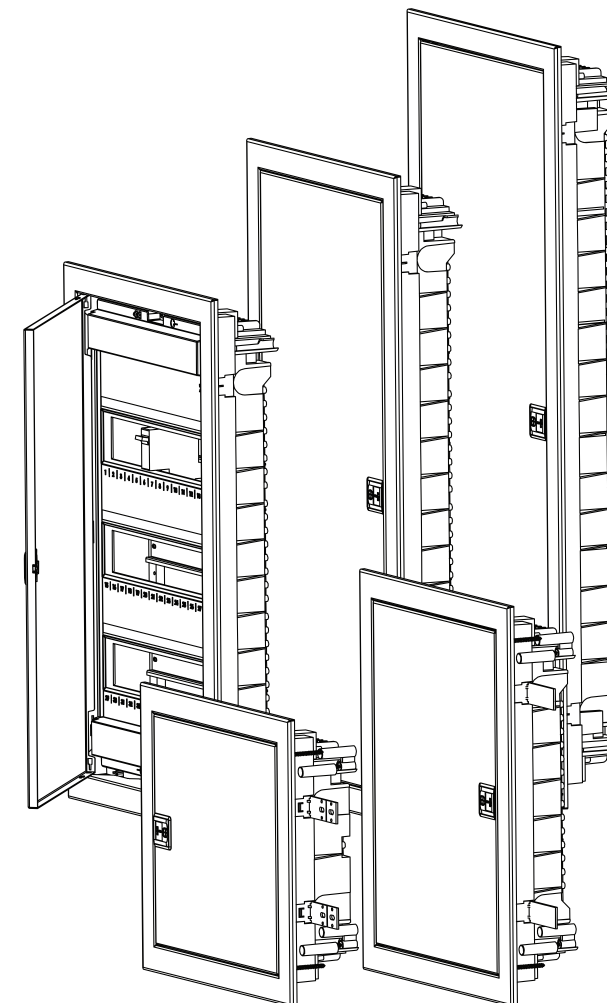

For indoor locations (S 50% RH at max. +40°C
or for example 90% RH at +20°C)
Temperature range: -25°C ... +60 °C.
Rating Voltage: AC 400 V; IP40, Class II; IK08
According to: IEC 60670; IEC 62208

Zdravka Jekića 119,
22305 Stari Banovci, Serbia
Phone: +381 22 351 223
e-mail: office@tehno-plast.com

TOOLS

