

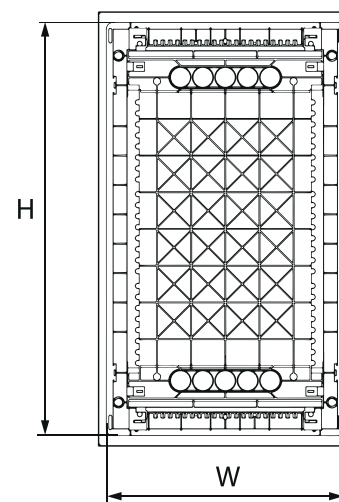
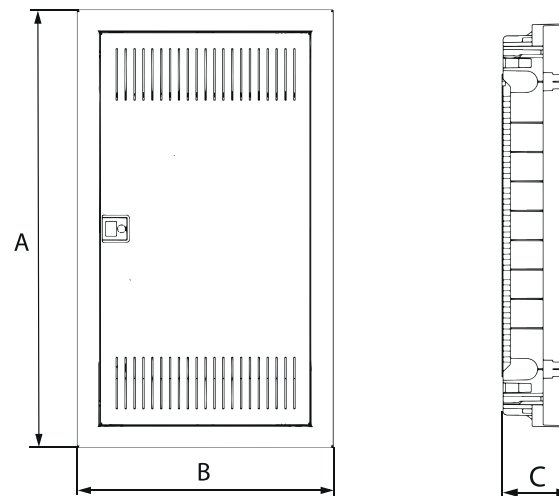


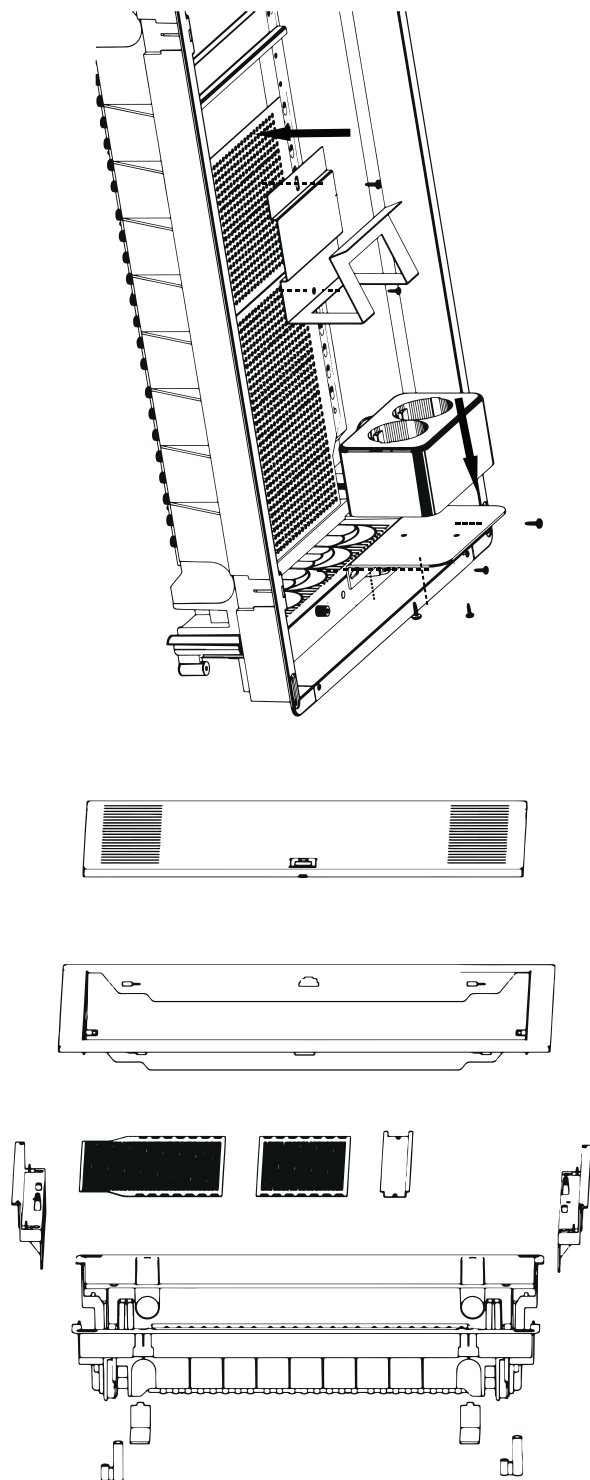

|          | A      | B      | C     | H      | W      |
|----------|--------|--------|-------|--------|--------|
| U24E-IT  | 442 mm | 346 mm | 92 mm | 399 mm | 306 mm |
| U36E-IT  | 592 mm | 346 mm | 92 mm | 549 mm | 306 mm |
| U48E-IT  | 717 mm | 346 mm | 92 mm | 673 mm | 306 mm |
| U 60E-IT | 842 mm | 346 mm | 92 mm | 799 mm | 306 mm |

For indoor locations (S 50% RH at max. +40°C  
or for example 90% RH at +20°C)  
Temperature range: -25°C ... +60 °C.  
Rating Voltage: AC 400 V; IP40, Class II; IK08  
According to: IEC 60670; IEC 62208

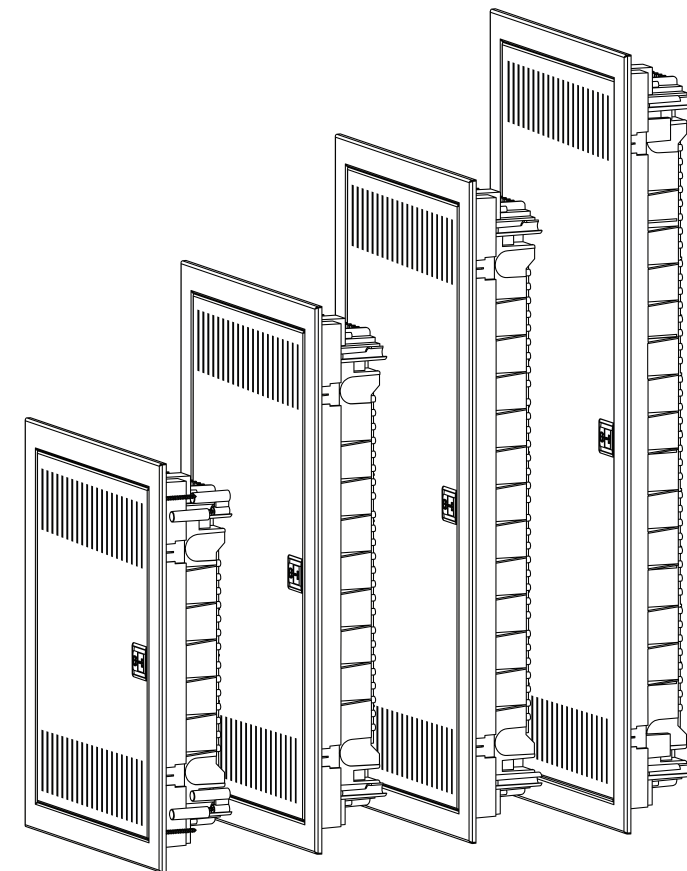

# TOOLS

